
RS5AB - RS5MB

SURFACE MOUNT FAST RECOVERY RECTIFIER DIODES

VOLTAGE RANGE: 50V-1000 V
CURRENT: 5.0 A




Features

- Glass Passivated Die Construction
- Fast Recovery Time for High Efficiency
- Low Forward Voltage Drop and High Current Capability
- Ideally Suited for Automatic Assembly
- Plastic Material: UL Flammability Classification Rating 94V-0

Mechanical Data

- Case: SMB,Molded Plastic
- Terminals: Solder Plated Terminal - Solderable per MIL-STD-202, Method 208
  Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.093 grams (approx.)

RoHS COMPLIANT

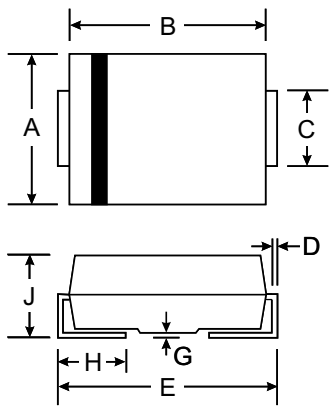

SMB(DO-214AA)		
Dim	**Min**	**Max**
A	3.30	3.94
B	4.06	4.70
C	1.91	2.21
D	0.15	0.31
E	5.00	5.59
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	RS5AB	RS5BB	RS5DB	RS5GB	RS5JB	RS5KB	RS5MB	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at T_L=75℃	$I_{(AV)}$	5.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150.0							A
Maximum instantaneous forward voltage at 5.0A	V_F	1.3							V
Maximum DC reverse current T_A=25℃ at rated DC blocking voltage T_A=100℃	I_R	5.0 100.0							μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	150				250	500		ns
Typical junction capacitance (NOTE 2)	C_J	78.0							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	50.0							°C/W
Operating junction and storage temperature range	T_J,T_{STG}	-65 to +150							°C

Note:1.Reverse recovery condition I_F=0.5A,I_R=1.0A,Irr=0.25A
2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3.P.C.B. mounted with 0.2x0.2″(5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES RS5AB THRU RS5MB

FIG. 1- FORWARD CURRENT DERATING CURVE

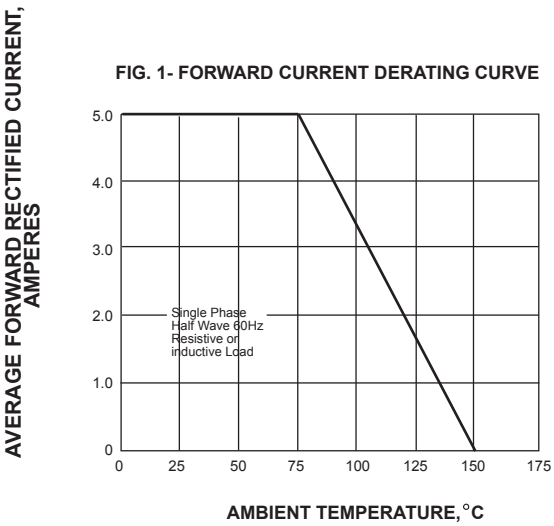


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

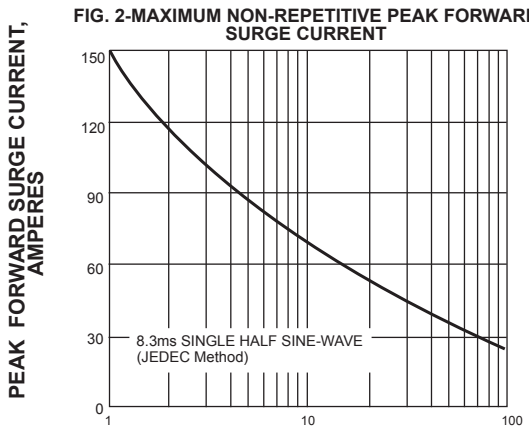


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

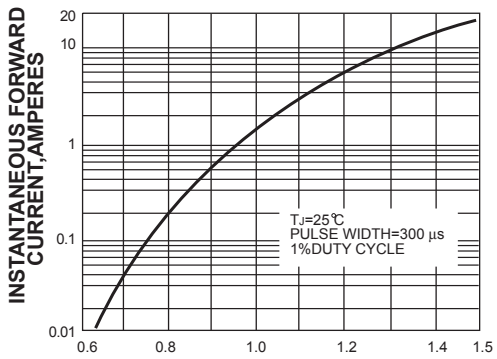


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

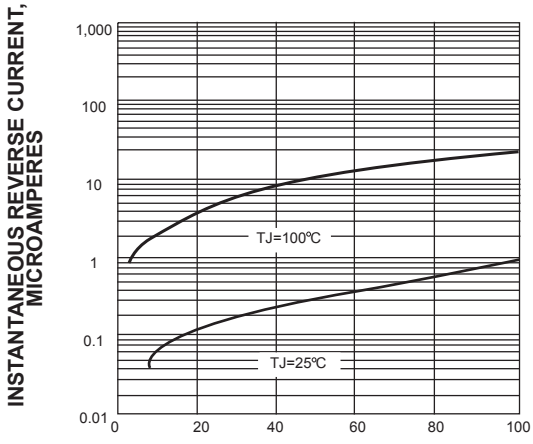


FIG. 5-TYPICAL TRANSIENT THERMAL IMPEDANCE

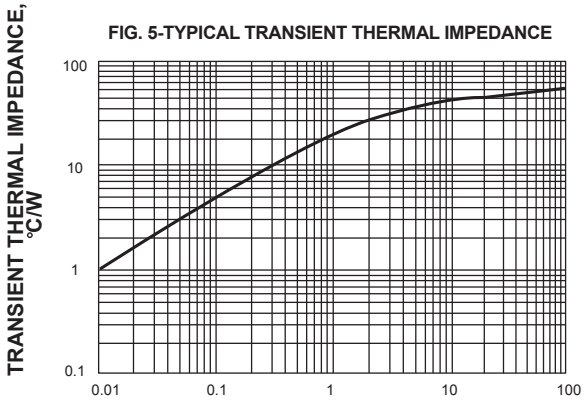


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

