

VOLTAGE RANGE: 10- 43V
POWER: 6600Watts

Features





- Ideally suited for load dump protection
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- AEC-Q101 qualified
- Junction passivation optimized design technology
- $T_J = 175^{\circ}\text{C}$ capability suitable for high reliability and automotive requirement
- Moisture sensitivity level: level 1, per J-STD-020
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- High temperature stability due to unique oxide passivation and patented PAR[®] construction
- Integrally molded heatsink provides a very low thermal resistance for maximum heat dissipation
- High temperature soldering guaranteed:
260°C for 10 seconds at terminals
- Low forward voltage drop

APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

Mechanical Data

- Case: DO-218AB
integrally mounted in the encapsulation
- Terminals: Plated, solderable per MIL-STD-750, Method 2026
- Polarity: Heatsink is anode
- Mounting Position: Any
- Weight: 2.691g (approximately)

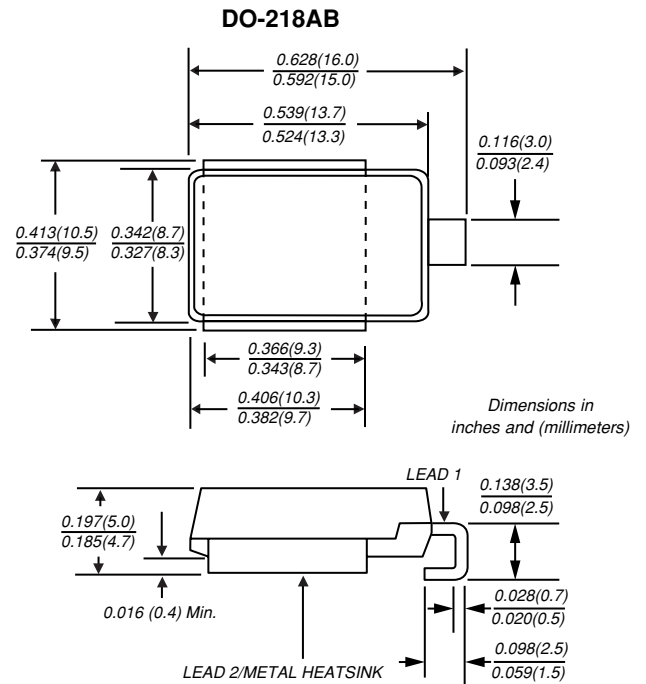

Maximum Ratings @ $T_A = 25^{\circ}\text{C}$ unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak pulse power dissipation with 10/1000 μs waveform 10/10,000 μs waveform	P _{PPM}	6600 5200	W
Steady state power dissipation	P _D	8.0	W
Peak pulse current with a 10/1000 μs waveform ⁽¹⁾	I _{PPM}	See Table 1	A
Peak forward surge current, 8.3ms single half sine-wave	I _{FSM}	700	A
Typical thermal resistance junction to case	R _{θJC}	0.90	°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +175	°C

Notes: (1) Non-repetitive current pulse derated above $T_A = 25^{\circ}\text{C}$

ELECTRICAL SPECIFICATIONS (T_A = 25°C unless otherwise noted)

Type	Breakdown Voltage V _(BR) (V)		Test Current I _T	Stand-off Voltage V _{WM}	Maximum Reverse Leakage at V _{WM} I _D	Maximum Reverse Leakage at V _{WM} T _c = 175°C I _D (μA)	Max. Peak Pulse Current at 10/1000μs Waveform (A)	Maximum Clamping Voltage at I _{PPM} V _C (V)
	Min.	Max.	(mA)	(V)	(μA)	I _D (μA)	(A)	(V)
SM8S10CA-H	11.1	13.6	5.0	10	15	250	351	18.8
SM8S10A-H	11.1	12.3	5.0	10	15	250	388	17.0
SM8S11CA-H	12.2	14.9	5.0	11	10	150	328	20.1
SM8S11A-H	12.2	13.5	5.0	11	10	150	363	18.2
SM8S12CA-H	13.3	16.3	5.0	12	10	150	300	22.0
SM8S12A-H	13.3	14.7	5.0	12	10	150	332	19.9
SM8S13CA-H	14.4	17.6	5.0	13	10	150	277	23.8
SM8S13A-H	14.4	15.9	5.0	13	10	150	307	21.5
SM8S14CA-H	15.6	19.1	5.0	14	10	150	256	25.8
SM8S14A-H	15.6	17.2	5.0	14	10	150	284	23.2
SM8S15CA-H	16.7	20.4	5.0	15	10	150	245	26.9
SM8S15A-H	16.7	18.5	5.0	15	10	150	270	24.4
SM8S16CA-H	17.8	21.8	5.0	16	10	150	229	28.8
SM8S16A-H	17.8	19.7	5.0	16	10	150	254	26.0
SM8S17CA-H	18.9	23.1	5.0	17	10	150	216	30.5
SM8S17A-H	18.9	20.9	5.0	17	10	150	239	27.6
SM8S18CA-H	20.0	24.4	5.0	18	10	150	205	32.2
SM8S18A-H	20.0	22.1	5.0	18	10	150	226	29.2
SM8S20CA-H	22.2	27.1	5.0	20	10	150	184	35.8
SM8S20A-H	22.2	24.5	5.0	20	10	150	204	32.4
SM8S22CA-H	24.4	29.8	5.0	22	10	150	168	39.4
SM8S22A-H	24.4	26.9	5.0	22	10	150	186	35.5
SM8S24CA-H	26.7	32.6	5.0	24	10	150	153	43.0
SM8S24A-H	26.7	29.5	5.0	24	10	150	170	38.9
SM8S26CA-H	28.9	35.3	5.0	26	10	150	142	46.6
SM8S26A-H	28.9	31.9	5.0	26	10	150	157	42.1
SM8S28CA-H	31.1	38.0	5.0	28	10	150	132	50.1
SM8S28A-H	31.1	34.4	5.0	28	10	150	145	45.4
SM8S30CA-H	33.3	40.7	5.0	30	10	150	123	53.5
SM8S30A-H	33.3	36.8	5.0	30	10	150	136	48.4
SM8S33CA-H	36.7	44.9	5.0	33	10	150	112	59.0
SM8S33A-H	36.7	40.6	5.0	33	10	150	124	53.3
SM8S36CA-H	40.0	48.9	5.0	36	10	150	103	64.3
SM8S36A-H	40.0	44.2	5.0	36	10	150	114	58.1
SM8S40CA-H	44.4	54.3	5.0	40	10	150	92.4	71.4
SM8S40A-H	44.4	49.1	5.0	40	10	150	102	64.5
SM8S43CA-H	47.8	58.4	5.0	43	10	150	86.0	76.7
SM8S43A-H	47.8	52.8	5.0	43	10	150	95.1	69.4

Note: For all types maximum V_F = 1.8V at I_F = 100A measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

CHARACTERISTICS CURVES ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

Fig.1 Power Derating Curve

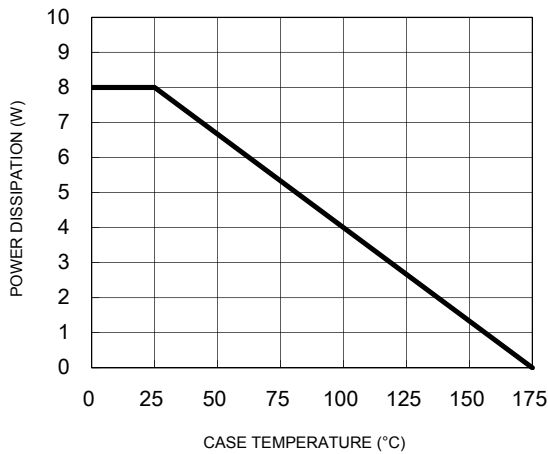


Fig.2 Load Dump Power Characteristics
(10ms Exponential Waveform)

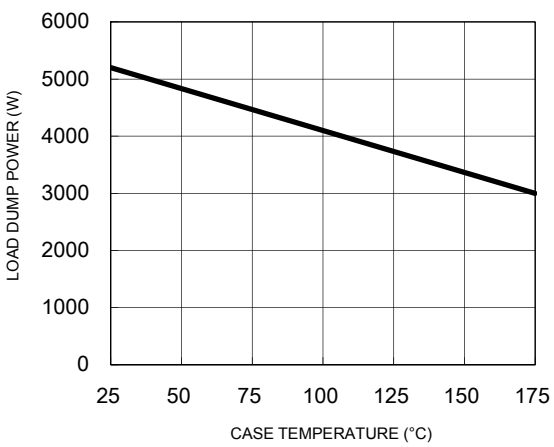


Fig.3 Clamping Power Pulse Waveform

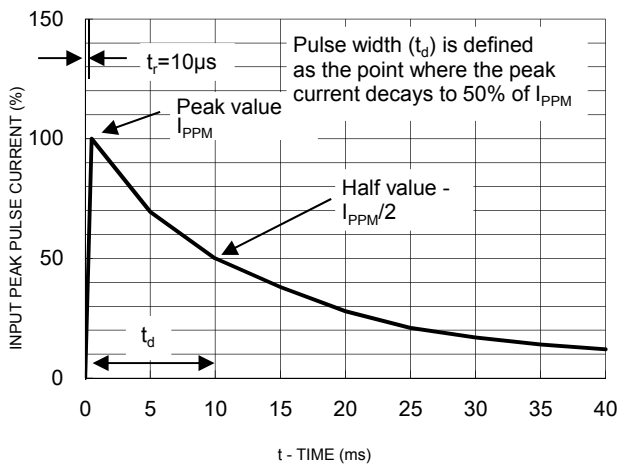


Fig.4 Reverse Power Capability

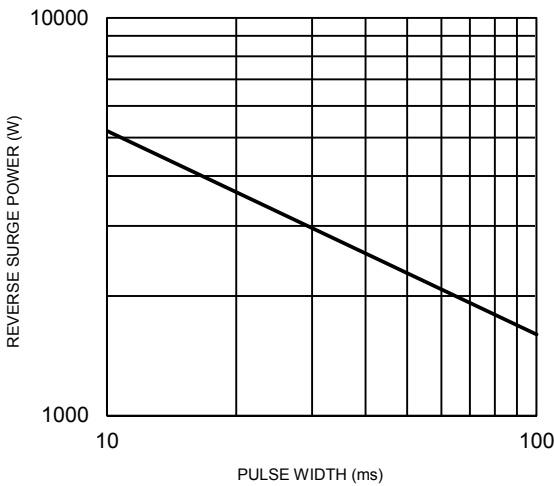


Fig.5 Typical Transient Thermal Impedance



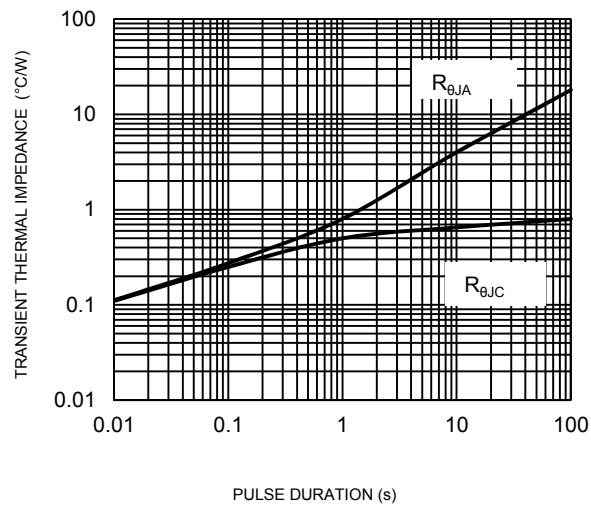


Fig.6 Typical Junction Capacitance

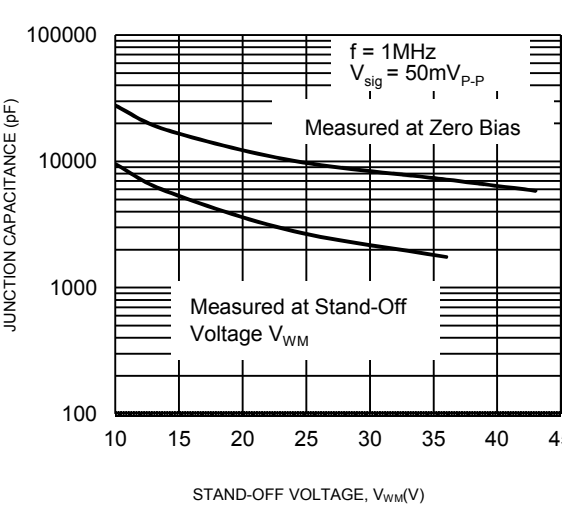


Part Numbering System



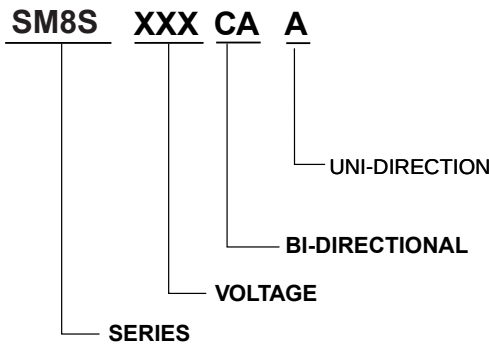


Soldering Parameters

Feflow Condition		Lead-free assembly
Pre Heat	- Temperature Min (T _{s(min)})	150°C
	- Temperature Max (T _{s(min)})	200°C
	- Time (min to max) (t _s)	60-180 secs
Average ramp up rate (Liquidus Temp (T _L) to peak		3°C/second max
TS(max) to T _L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T _L) (Liquidus)	217°C
	- Time (min to max) (t _s)	60-150 seconds
Peak Temperature (T _p)		260+0/-5 °C
Time within 5°C of actual peak Temperature (t _p)		20-40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T _p)		8 minutes Max.
Do not exceed		280°C

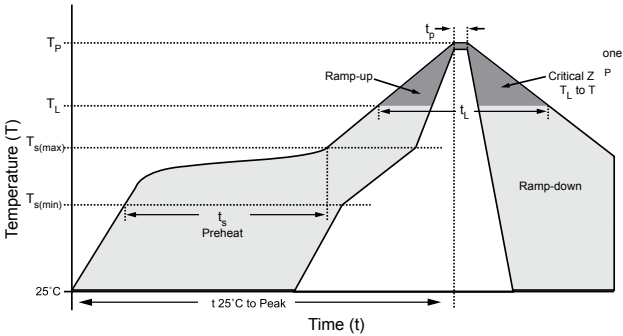

Surface Mount Tape and Reel Packaging

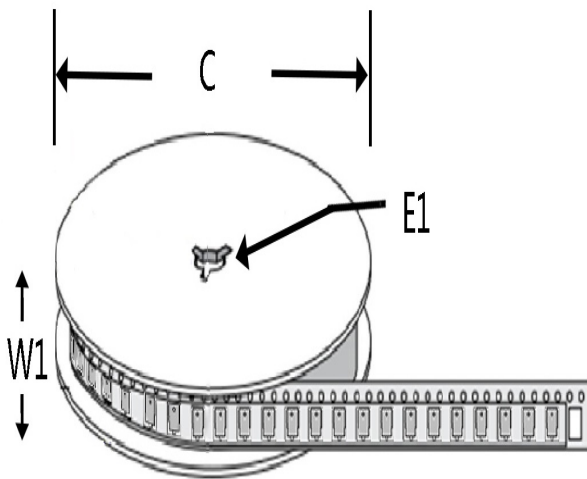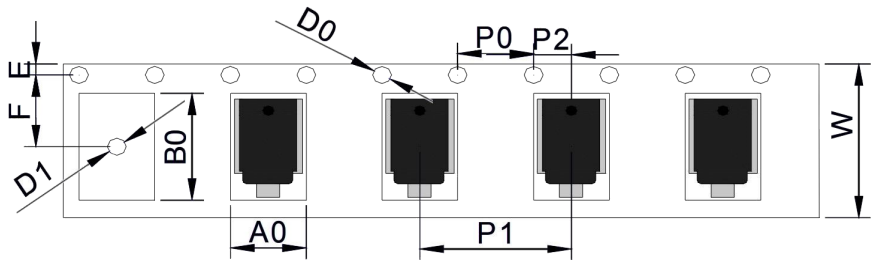

Ref.	Dimensions	
	Millimeters	Inches
A0	10.80 ± 0.3	0.425± 0.012
B0	16.13 ± 0.3	0.635 ± 0.012
C	330.0 ± 0.3	13.0 ± 0.012
D0	1.55 ± 0.2	0.061 ± 0.008
D1	1.55 ± 0.2	0.061± 0.008
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.30 ± 0.2	0.524 ± 0.008
F	11.50 ± 0.2	0.453 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	16.00 ± 0.2	0.630 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	24.00 ± 0.2	0.945 ± 0.008
W1	25.85 ± 0.2	1.018 ± 0.008

ORDERING INFORMATION

PART No.	UNIT WEIGHT (g)typ	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
SM8SxxA	2.985	750	3000	13 inch reel pack



Notice

- Reproducing and modifying information of the document is prohibited without permission from SUNMATE electronics.
- SUNMATE electronics reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- SUNMATE electronics or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies including damages incidentally and consequentially occurred.
- No license, express or implied, to any intellectual property rights is granted by this document, SUNMATE electronics assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of SUNMATE products including warranties of fitness for particular purpose and merchantability or infringement of any patent, copyright, or other intellectual property right.
- Purchasers are solely responsible for the choice, selection, and use of sunmate products and sunmate assumes no liability for application assistance or the design of Purchasers' products. Information contained herein is intended to provide a product description only.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify SUNMATE electronics for any damages resulting from such improper use or sale.
- This document is the 3.3rd version which is made in 7-Nov.-2020.

This document supersedes and replaces all information previously supplied.

LOGO(SUNMATE) is a registered trademark of SUNMATE Electronics Co.,Ltd.