UF5AB - UF5MB

SURFACE MOUNT ULTRA FAST RECTIFIER DIODES

VOLTAGE RANGE: 50 - 1000V
CURRENT: 5.0 A




Features

- Glass Passivated Die Construction
- Ideally Suited for Automatic Assembly
- Low Forward Voltage Drop, High Efficiency
- Low Power Loss
- Ultra-Fast Recovery Time
- Plastic Case Material has UL Flammability Classification Rating 94V-O

Mechanical Data

- Case: SMB/DO-214AA, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.093 grams (approx.)

RoHS COMPLIANT

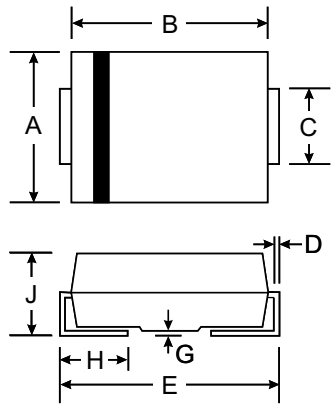

SMB(DO-214AA)		
Dim	**Min**	**Max**
A	3.30	3.94
B	4.06	4.70
C	1.91	2.21
D	0.15	0.31
E	5.00	5.59
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics

T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	UF5AB	UF5BB	UF5DB	UF5GB	UF5JB	UF5KB	UF5MB	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current 0.375″(9.5mm) lead length at T_A=55℃	$I_{(AV)}$	5.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) T_L=25℃	I_{FSM}	150.0							A
Maximum instantaneous forward voltage at 5.0A	V_F	1.0			1.40		1.70		V
Maximum DC reverse current T_A=25℃ at rated DC blocking voltage T_A=100℃	I_R	10.0 300.0							μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	50					75		ns
Typical junction capacitance (NOTE 2)	C_J	15					12		pF
Typical thermal resistance (NOTE 3)	$R_{\Theta JL}$	15.0							°C/W
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150							°C

Note: 1.Reverse recovery condition I_F=0.5A,I_R=1.0A,Irr=0.25A
2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3.Thermal resistance from junction to lead and from junction to ambient with P.C.B mounted on 0.3 x 0.3" (8.0 x 8.0 mm) Copper pad area

RATINGS AND CHARACTERISTIC CURVES UF5AB THRU UF5MB

FIG. 1- FORWARD CURRENT DERATING CURVE

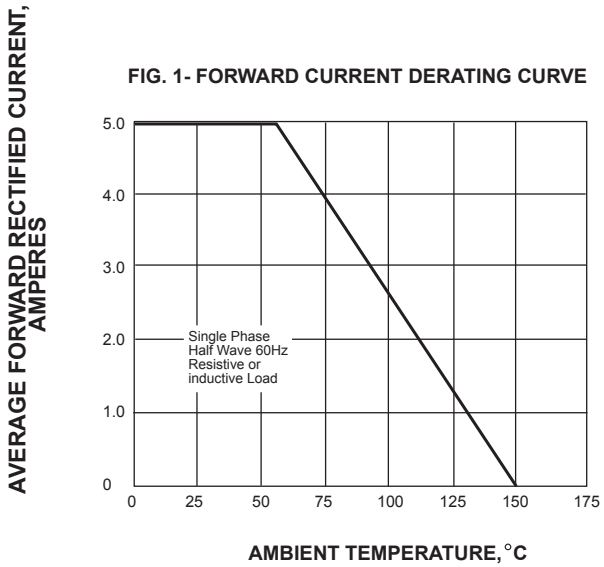


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

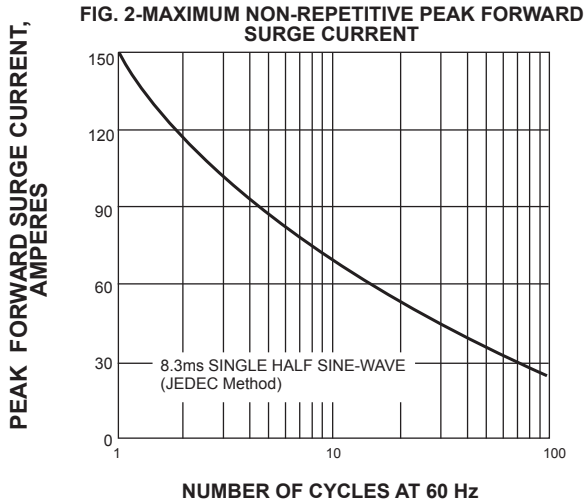


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

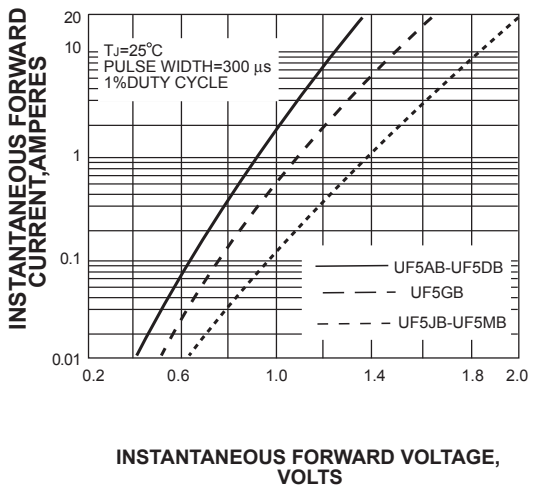


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

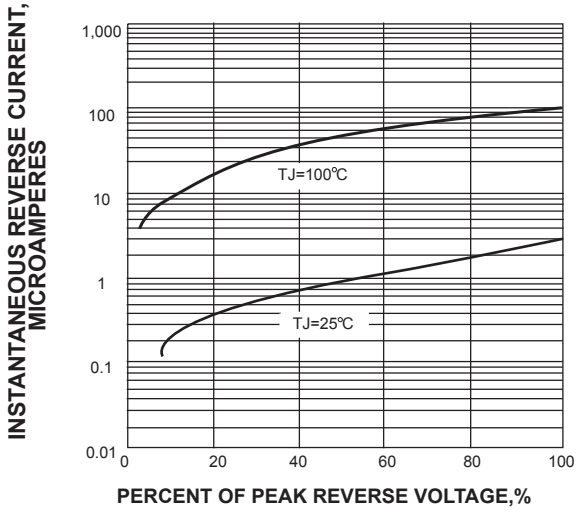


FIG. 5-TYPICAL JUNCTION CAPACITANCE

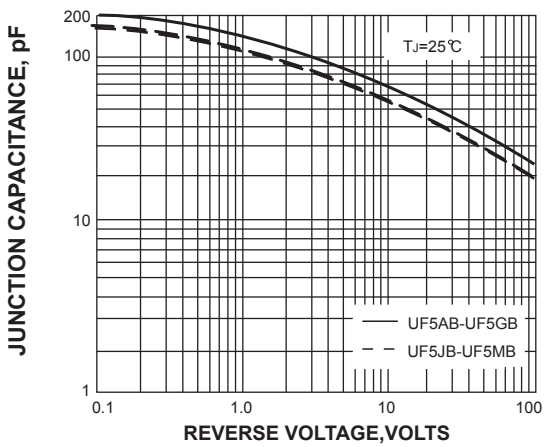


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

