

**VOLTAGE RANGE: 25KV**  
**CURRENT: 5.0mA**

### Features


- High speed switching
- Low VF
- High surge resistivity for CRT discharge
- High reliability design
- Ultra small package

### Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power



### Outline Drawings : mm

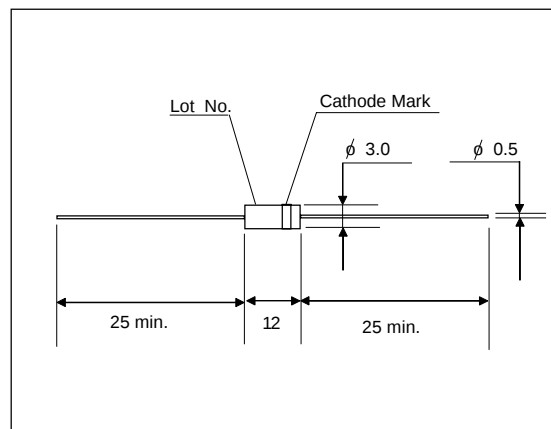

### Maximum Ratings and Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise specified

| Characteristic                                                               | Symbols          | 2CL79       | Units |
|------------------------------------------------------------------------------|------------------|-------------|-------|
| Repetitive Peak Reverse Voltage                                              | V <sub>RRM</sub> | 25          | kV    |
| Average Output Current<br>Ta=25°C, Resistive Load                            | I <sub>O</sub>   | 5.0         | mA    |
| Surge Current                                                                | I <sub>FSM</sub> | 0.5         | A     |
| Maximum Forward Voltage Drop<br>at 25°C, I <sub>F</sub> = I <sub>F(AV)</sub> | V <sub>F</sub>   | 50          | V     |
| Maximum Reverse Current<br>at 25°C<br>at 100°C                               | V <sub>RRM</sub> | 2.0         | uA    |
|                                                                              |                  | 5.0         | uA    |
| Maximum Reverse Recovery Time<br>at 25°C                                     | T <sub>rr</sub>  | 100         | nS    |
| Junction Capacitance<br>at 25°C, V <sub>R</sub> =0V, f=1MHz                  | C <sub>j</sub>   | 1.0         | pF    |
| Junction Temperature                                                         | T <sub>J</sub>   | 125         | °C    |
| Allowable Operation Case Temperature                                         | T <sub>C</sub>   | 125         | °C    |
| Storage Temperature                                                          | T <sub>stg</sub> | -40 to +125 | °C    |