RE1600A - RE2000A

SURFACE MOUNT HIGH VLTAGE RECTIFEER DIODES

VOLTAGE RANGE: 1600V - 2000V
CURRENT: 1.0 A



Features

- Construction utilizes void-free
- molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds,0.375"(9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

- Case: SMA/DO-214AC, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.064 grams (approx.)

RoHS COMPLIANT

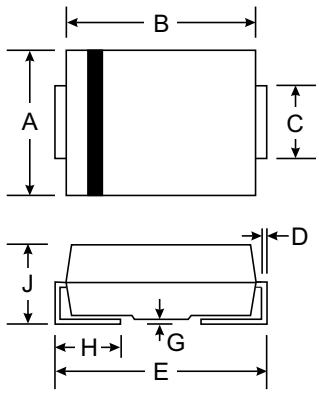

SMA(DO-214AC)		
Dim	**Min**	**Max**
A	2.29	2.92
B	4.00	4.60
C	1.27	1.63
D	0.15	0.31
E	4.80	5.59
G	0.10	0.20
H	0.76	1.52
J	2.01	2.62
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics T_A = 25 C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	RE1600A	RE1800A	RE2000A	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	1600	1800	2000	V
Maximum RMS voltage	V_{RMS}	1120	1260	1400	V
Maximum DC blocking voltage	V_{DC}	1600	1800	2000	V
Maximum average forward rectified current 0.375"(9.5mm) lead length at T_A=75℃	$I_{(AV)}$	1.0			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0			A
Maximum instantaneous forward voltage at 1.0A	V_F	1.9			V
Maximum DC reverse current T_A=25℃ at rated DC blocking voltage T_A=100℃	I_R	5.0 200.0			uA
Typical junction capacitance (NOTE 1)	C_J	15.0			pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	45.0			°C/W
Operating junction and storage temperature range	T_J T_{STG}	-65 to +175			°C